

INVENGO XWING™ Paper Face Label



100% of real size

NXP UCODE8



About Invengo's xWing™

The Invengo xWing™ tags and inlays, equipped with the NXP UCODE8 IC's, are designed to enable end-users to reach and sustain high levels of performance in all global RAIN RFID (UHF) frequency regions. Within the area of apparel, brand protection, industrial and supply chain management solutions, Invengo's xWing™ tag and inlays can be called one of the best in class.



Invengo – the global RFID technology provider – is a leading developer and manufacturer of high quality, intelligent RAIN RFID and HF/NFC connectivity solutions and consumables (tags & inlays) utilized in the Internet of Things. With a focus on RFID innovation, Invengo has created a leading product line in retail, (industrial) laundry, library, (public) transportation, healthcare, and many other industries.

Invengo Technology Pte. Ltd. (SG) is the International Headquarters of Invengo Information Technology Co. Ltd, listed on Shenzhen Stock Exchange (SZSE: 002161.SZ). Employing over 600 people globally, Invengo is one of the largest publicly traded, RFID / IoT oriented companies in the world.

Key Benefits

- High Supply Chain performance for a wide range of applications
- Compact slim design
- Serialized TID
- ISO 9001:2008 Quality Management System and ISO 14001:2004 Environment Management System support
- 100% Quality Tested

Application Areas

- Item Level
- Retail
- Logistics

Product Specifications

RFID

Protocols Supported	EPCglobal C1 Gen 2, ISO/IEC18000-6C
Integrated Circuit (IC)	NXP UCODE8
Operating Frequency	840 to 960MHz
EPC size	Up to 128 bits
TID	96 bits and 48 bits serialized number
Access password	32 bits
Kill password	32 bits

Environmental

Operating Temperature	-40°C to 85°C (-40°F to 185°F)
Recommended	-20°C to 50°C (-4°F to 122°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Recommended	±25°C(13°C-77°C)
Shelf Life	Min. 2 yrs from date manufacturing in 20°C (68°F) @ 50% RH
Bending Diameter	> 50 mm, tension max. 10 N
Static Pressure	<10 MPa (10 N/mm2)
ESD	± 2000V peak
Adhesive	Acrylic
Data retention	10 years
Endurance	100.000 cycles

Dimensions

Antenna Size (A x B)	68.7 x 17 mm
Die-cut Size (C x D)	70 x 19 mm(2.76x0.75)
Web Width (E)	74 mm (2.91 in)
Pitch (F)	22.49 mm (0.89 in)
PET Thickness	0,05 mm (0.002 in)
Antenna Thickness	0,009 mm (0.0003 in)
Core Size (H)	76.2 mm (3 in)


Order Information

Product code	XC-TF8029-C107-FPI
Packaging	Carton boxes
Box Size	265×253×180mm (10.43 x 9.96 x 80.9 in)
Weight	± 2,9 kg (6.39 lbs)/roll ± 6,1 kg (13.45 lbs)/box
Quantity pc p/roll; roll p/box	4000pcs/roll,2roll/box


Inlay Design



Inlay Stackup



Winding / Dimensions

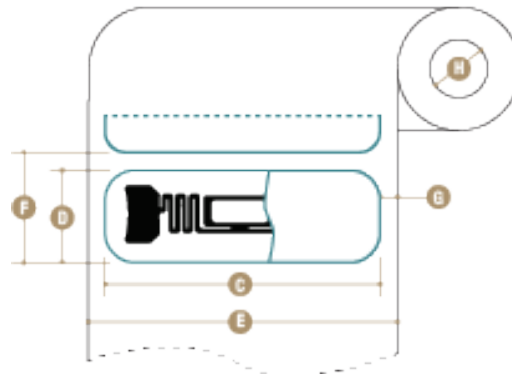

APAC / EMEA

Invengo Technology Pte. Ltd

10 Kallang Avenue
#05-15 Tower 2, Aperia
Singapore 339510

Office: +65 6702 3909
sales@invengo.com

Americas Sales

Invengo Technology Corp.

1011 S HAMILTON RD
Ste 300 CHAPEL HILL
NC 27517-4409 USA

Office: +1 919 890 0202
sales.americas@invengo.com

Global Library Solutions

FE Technologies Pty Ltd

129 Fyans Street
SOUTH GEELONG
Australia 3220

Office: +1 300 731 991
enquiries@fetechgroup.com

Global Handhelds Solutions

ATID CO.,LTD.

#603, 184, Gasan digital 2-ro,
Geumcheon-gu, Seoul,
Republic of Korea, 08501

Office: +82 544 1436
inquiry@atid1.com